

Picosecond Micromachining Laser

single shot to 8 MHz pulse repetition rate

High energy, 5 W average power

Applications

- Cold ablation
- Thin-film structuring
- Glass welding
- High-energy physics
- Pump-probe experiments
- Material research
- OPG/OPA pumping
- Biomedical, tissue cutting

Features

- 24/7 reliability
- Industrial grade packaging
- Turn-key operation
- Low maintenance
- Flexibility
- FlexBurst™




Options

- 532 nm, 355 nm output
- Pulse on demand
- Remote control
- Clock synchronization


up to 5 W	output power
single-shot – 8 MHz	repetition rate
200 µJ	pulse energy
< 12 ps	pulse width
16 MW	peak power
1064 nm	wavelength
< 1.3	M ² (TEM ₀₀)

SERIES | DUETTINO™


The DUETTINO laser system is a versatile tool to process virtually any material with highest precision and reliability. The picosecond pulse duration results in cold ablation with minimum thermal side effects and thus superior quality. The DUETTINO offers unmatched speed and flexibility with its very wide range of repetition rates, pulse energies, burst sizes and shapes. This enables the user to drive his application with the optimum process parameters.

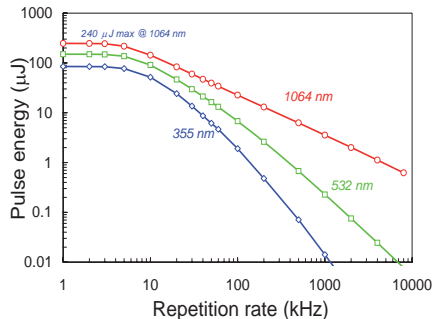


Typical pulse energy versus repetition rate for 1064 nm, 352 nm, and 355 nm

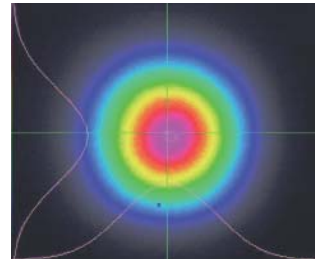

Output beam profile

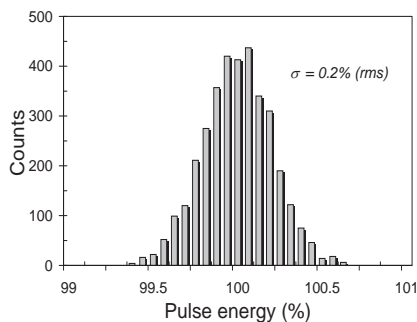

Pulse energy stability. The histogram shows the energy distribution of 3500 pulses with an rms fluctuation of 0.2%

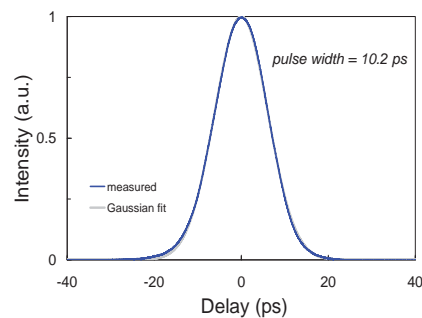

Autocorrelation trace

The pulse and beam quality as well as stability of the DUETTINO is excellent and maintained over the full range of repetition rates, burst sizes, etc., without any adjustments. The thorough laser design and derated pump currents ensure long life and keep the system virtually maintenance free even in rough environments. It is simple to use, easy to install, fully system integrable, and offers a broad range of options to suit your particular requirements.

Additional specifications	DUETTINO
turn-on time	< 15 min
pointing stability	< 40 µrad / °C
pulse energy stability (>1kHz)	< 0.5% rms
voltage	100 VAC – 240 VAC, single phase
frequency	50 Hz – 60 Hz
input power (single phase)	1350 VA
laser head (size, weight)	695 mm x 135 mm x 410 mm, 42 kg
power supply (size, weight)	435 mm x 139 mm (3 HU) x 483 mm (19"), 14 kg
chiller (size, weight)	220 mm x 390 mm x 280 mm, 9.5 kg



Does the DUETTINO laser system match your requirements? Please let us know the specifications of the laser you are looking for. A superior technology and a strong team enable us to tailor our products to your special needs.

All specifications are subject to change without notice. All numbers given in this datasheet are typical values and may depend on the specific laser configuration. SESAM is a registered trademark in the following countries: USA, Switzerland, United Kingdom, Germany, Austria, Netherlands, Belgium, Luxembourg, France, Italy, Russia, China, Liechtenstein, Estonia, and Lithuania. This product is protected by one or several of the following patents: US6,538,298, US6,466,604, US7,386,019

Technoparkstrasse 1
CH - 8005 Zürich
Switzerland
+41 (0)44 445 3120
info@tbwp.com
www.tbwp.com

